



Toolless Cat.6A Keystone Jack, Slim Type

Technical Features

Cat.6A Class EA, 500 MHz, 10 Gbit/s Ethernet

Test: ISO/IEC 11801 permanent link (PL2)

Slim design, only 16.3 mm width

Suitable for 22–24 AWG solid wire and 22–26 AWG stranded wire

Suitable for cable diameter of 5 to 9 mm

Supports PoE, PoE+ and PoE++ applications

Art no.	Shielding Type	EAN Code
NK4071	STP	4052792074062
NK4072	UTP	4052792074079



NK4071




NK4072




Technical Drawing

NK4071

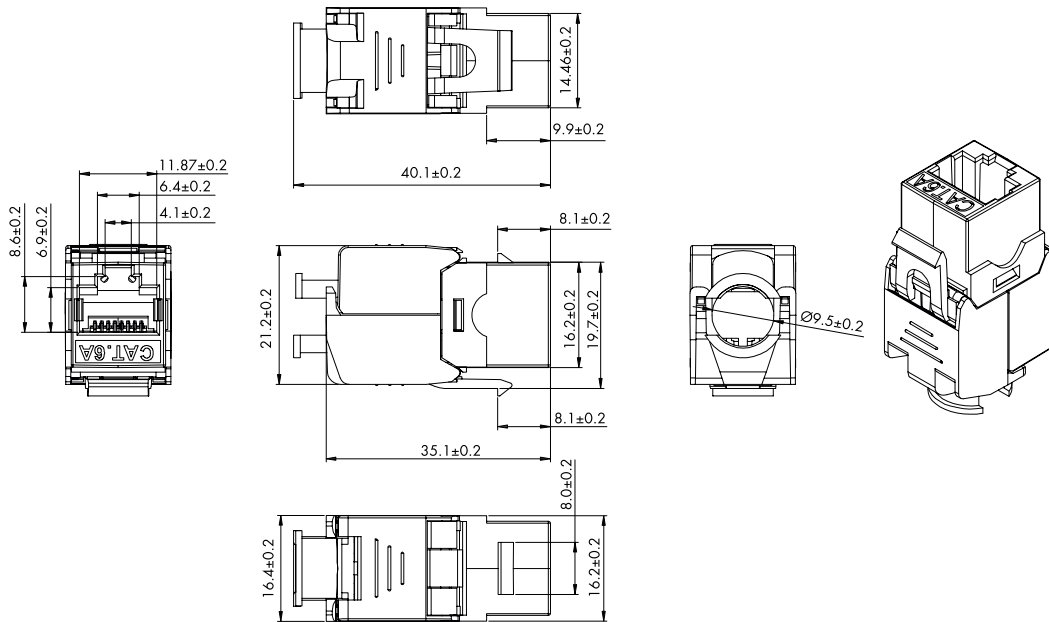

NK4072

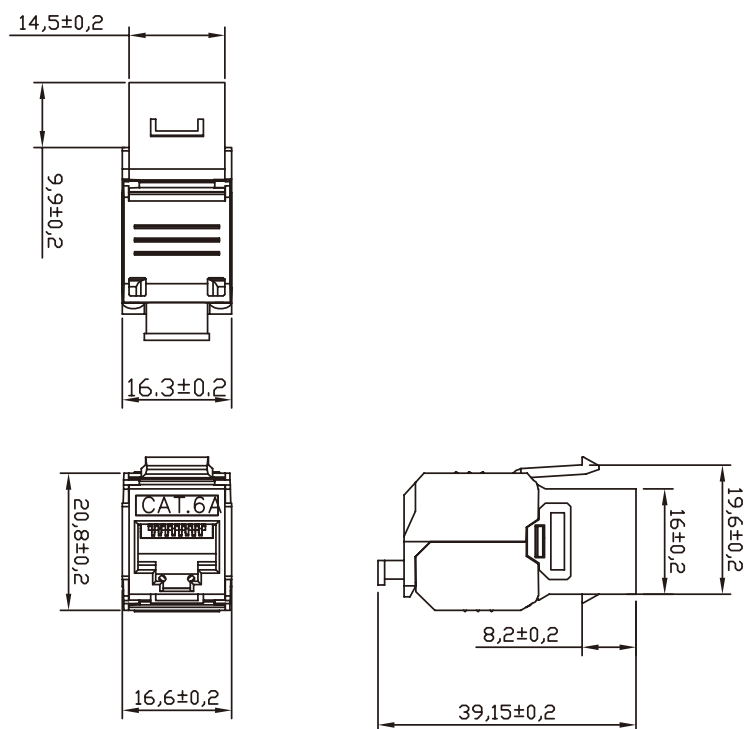

Unit: mm

Package Content

1x Cat.6A Keystone Jack

Packaging Information

Art no.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Packing Weight
NK4071	100 x 80 x 30 mm	0.028 kg	490 x 200 x 310 mm	500 pcs	14.8 kg
NK4072	100 x 80 x 30 mm	0.011 kg	490 x 200 x 310 mm	500 pcs	6.3 kg

