

3MP+3MP HD Indoor Dual-lens PT Wi-Fi Camera

Uho-S3S-M33D



Features

- Fixed camera and PT camera integration, dual channels with one IP, look at overall situation and consider details at the same time
- Ultra 265, H.265, H.264
- Support digital WDR (Wide Dynamic Range)
- Built-in Mic & Speaker, support two-way audio, offer better interaction
- Support sound and light warning, makes warning and alarming more noticeable
- Smart IR, up to 10m (33ft) IR and 10m (33ft) warm light distance, suitable for more scenes
- IR & warm light illumination to deal with different scenes and achieve full-color illumination
- Supports 512 GB Micro SD card
- Wi-Fi connection and easy installation

Specifications

| Camera | Description |
|--|--|
| Sensor-Panorama | 1/2.8", 3MP, CMOS |
| Min. Illumination-Panorama | Colour:0.01 lux (F2.0,AGC ON) 0 lux with IR |
| Day/Night-Panorama | IR-cut filter with auto switch (ICR) |
| Sensor-Detail | 1/2.8", 3MP, CMOS |
| Min. Illumination-Detail | Colour:0.01 lux (F2.0,AGC ON) 0 lux with IR |
| Day/Night-Detail | IR-cut filter with auto switch (ICR) |
| Shutter | Auto/Manual, 1 ~ 1/100000s |
| WDR | DWDR |
| S/N | >52dB |
| Lens | Description |
| Lens Type—Panorama | 4.0mm@F2.0 |
| Digital Zoom—Panorama | N/A |
| Iris—Panorama | Fixed |
| Field of View (H)—Panorama | 91.5° |
| Field of View (V)—Panorama | 48.1° |
| Field of View (D)—Panorama | 96.3° |
| Lens Type-Detail | 4.0mm@F2.0 |
| Digital Zoom—Detail | 4X |
| Iris—Detail | Fixed |
| Field of View (H)—Detail | 91.5° |
| Field of View (V)—Detail | 48.1° |
| Field of View (D)—Detail | 96.3° |
| DORI | Description |
| DORI Distance (Lens) — Panorama | 4.0mm |
| DORI Distance (Detect) — Panorama | 73.5 (241.0ft) |
| DORI Distance (Observe) — | 29.4 (96.4ft) |


| | |
|---|--|
| Panorama | |
| DORI Distance (Recognize) — Panorama | 14.7 (48.2ft) |
| DORI Distance (Identify) — Panorama | 7.3(24.1ft) |
| DORI Distance (Lens) —Detail | 4.0mm |
| DORI Distance (Detect) —Detail | 73.5 (241.0ft) |
| DORI Distance (Observe) — Detail | 29.4 (96.4ft) |
| DORI Distance (Recognize) — Detail | 14.7 (48.2ft) |
| DORI Distance (Identify) —Detail | 7.3(24.1ft) |
| Illuminator | Description |
| IR Range—Panorama | 10m |
| Warm Light Range—Panorama | N/A |
| Wavelength—Panorama | 850 nm |
| IR Range—Detail | 10m |
| Warm Light Range—Detail | 10m |
| Wavelength—Detail | 850 nm |
| Light On/Off Control | Auto/Manual |
| Video | Description |
| Frame Rate—Panorama | Main Stream: 3MP (2304*1296), Max 15fps; 2MP (1920*1080), Max 15fps; 720P (1280*720), Max 15fps; Sub Stream: 640*360,Max 15fps; 2CIF(704*288), Max 15fps; CIF(352*288), Max 15fps; |
| Video Compression | Ultra 265; H.265; H.264 |
| Frame Rate—Detail | Main Stream: 3MP (2304*1296), Max 15fps; 2MP (1920*1080), Max 15fps; 720P (1280*720), Max 15fps; Sub Stream: 640*360,Max 15fps; 2CIF(704*288), Max 15fps; CIF(352*288), Max 15fps; |
| Frame Rate—Main Stream | 3MP (2304*1296), Max 15fps; 2MP (1920*1080), Max 15fps; 720P (1280*720), Max 15fps; |
| Frame Rate—Sub Stream | 640*360,Max 15fps; 2CIF(704*288), Max 15fps; CIF(352*288), Max 15fps; |
| Video Bit Rate | 128 Kbps ~ 6144 Kbps |
| ROI | Up to 8 areas |
| Video Stream | Triple Streams |
| OSD | Up to 4 OSDs |

| | |
|-------------------------|---|
| Privacy Mask | Support(Only NVR) |
| Image | Description |
| White Balance | Auto; Outdoor; Fine Tune; Sodium Lamp; Locked; Auto2 |
| Digital Noise Reduction | 2D/3D DNR |
| Smart IR | Support |
| Flip | Normal; Flip Vertical; Flip Horizontal; 180° |
| HLC | N/A |
| BLC | N/A |
| Defog | Digital Defog |
| Events | Description |
| Basic Detection | Motion Detection; Ultra Motion Detection (human/ vehicle/ pet); Loud Sound Detection; Crying Detection; Tampering Alarm |
| Auto Tracking—Panorama | N/A |
| Auto Tracking—Detail | Support |
| General Function | IP Address Filtering; Access Policy; ARP Protection; RTSP Authentication; User Authentication; HTTP authentication |
| Audio | Description |
| Audio Compression | G.711U; G.711A |
| Audio Bitrate | 64 Kbps |
| Two-way Audio | Support |
| Suppression | Support |
| Sampling Rate | 8KHZ |
| Storage | Description |
| Edge Storage | Micro SD, up to 512 GB |
| Network Storage | ANR |
| Network | Description |
| Wi-Fi | 2.4G Wi-Fi (IEEE802.11b/g/n/ax), built-in antenna |
| Protocols | IPv4; TCP; UDP; DHCP; RTSP; DNS; DDNS; NTP; HTTP |
| Compatible Integration | API |
| Client | Uniarch Client; Uniarch APP |
| Web Browser | Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above |

| Wi-Fi | Description |
|---------------------|---|
| Wireless Standards | IEEE802.11b/g/n/ax |
| Frequency Range | 2.4 GHz ~ 2.4835 GHz |
| Channel Bandwidth | 20/40 MHz Support |
| Modulation Mode | 802.11b: CCK 802.11g/n: OFDM 802.11ax: OFDMA |
| Wi-Fi Security | 64/128-bit WEP, WPA-PSK/WPA2-PSK |
| Transmit Power | 802.11b: $17 \pm 1.5\text{dBm}$ @11Mbps 802.11g: $16 \pm 1.5\text{dBm}$ @54Mbps 802.11n: $16 \pm 1.5\text{dBm}$ @MCS7 802.11ax: $16 \pm 1.5\text{dBm}$ @MCS9 |
| Receive Sensitivity | 802.11b: -76dBm @11Mbps (Typical) 802.11g: -65dBm @54Mbps (Typical) 802.11n: -61dBm @MCS7, HT40 (Typical) 802.11ax: -54dBm @MCS9, HE40 (Typical) |
| Transmission Rate | 802.11b: 11Mbps 802.11g: 54Mbps 802.11n: up to 150Mbps 802.11ax: up to 270Mbps |
| PTZ | Description |
| Pan Range—Panorama | N/A |
| Pan Speed—Panorama | N/A |
| Tilt Range—Panorama | $0^\circ \sim 15^\circ$ |
| Tilt Speed—Panorama | N/A |
| Pan Range—Detail | $0^\circ \sim 355^\circ$ |
| Pan Speed—Detail | $17^\circ/\text{s} \sim 50^\circ/\text{s}$ Preset speed: $50^\circ/\text{s}$ |
| Tilt Range—Detail | $-15^\circ \sim 90^\circ$ |
| Tilt Speed—Detail | $17^\circ/\text{s} \sim 50^\circ/\text{s}$ Preset speed: $50^\circ/\text{s}$ |
| Number of Presets | 20 |
| Interface | Description |
| Built-in Mic | Support |
| Built-in Speaker | Support |

| | |
|----------------------|--|
| WIFI | Support |
| Network | 1 x RJ45 10M/100M Base-TX Ethernet |
| Video Output | N/A |
| Certification | Description |
| EMC | CE EMC (EN 55032,EN 61000-3-3,EN IEC 61000-3-2,EN 50130) FCC (FCC 47 CFR part15 B) |
| RF | FCC ID (FCC CFR 47 part15 C) CE RED (EN 301 489-1, EN 301 489-17, EN 300 328, EN 62311) |
| Safety | CE LVD (EN 62368-1) |
| Environment | CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU) |
| Protection | IP66 (IEC 60529) |
| General | Description |
| Power | DC 5V/1.5A USB type-C interface |
| Dimensions | Φ80 x 127mm (Ø3.1" x 4.8") |
| Weight | 0.22kg(0.49lb) |
| Working Environment | -30°C ~ 60°C (-22°F to 140°F), Humidity: ≤95% RH(non-condensing) |
| Storage Environment | -30°C ~ 60°C (-22°F to 140°F), Humidity: ≤95% RH(non-condensing) |
| Surge Protection | 4KV |
| Reset Button | Support |
| LED Indicator | 1, red/blue |

Dimensions

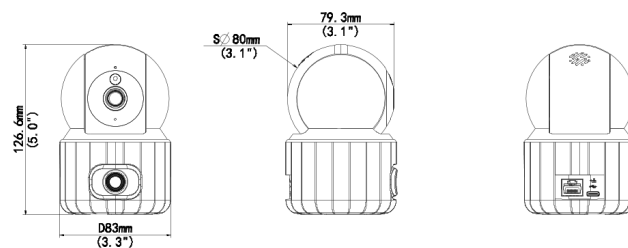

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.



ΔΗΛΩΣΗ ΣΥΜΜΟΡΦΩΣΗΣ ΕΕ

Nr 2023/01041

Για τα ακόλουθα προϊόντα

εξοπλισμού

: WIFI Κάμερα

Τύπος Προϊόντος/Εμπορικό

Uho-S3E-M3

Σήμα:

Uho-S2

Uho-S3E-M5TD

Uho-S3S-M33D

Uho-P2S-M33F34

Uho-B2D-M3F3D

Uho-P1A-M3F4D

Όνομα Κατασκευαστή:

: ZHEJIANG UNIVIEW TECHNOLOGIES CO., LTD

Διεύθυνση Κατασκευαστή:

: No. 369, Xietong Road, Xixing Sub-district,
Binjiang District, Hangzhou City, China (zhejiang)
Pilot Free Trade Zone

στο οποίο αναφέρεται η παρούσα δήλωση, και είναι σύμφωνο με τα ακόλουθα πρότυπα ή άλλα έγγραφα κανονισμού:"

Οδηγία 2014/53/ΕΕ του Συμβουλίου - Οδηγία για τους φορείς καταχώρισης

EN 55032:2015+A11:2020+A1:2020
EN 50130-4:2011+A1:2014
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A1:2019+A2:2021
EN IEC 62368-1:2020+A11:2020
EN 301 489-1
EN 301 489-17
EN 300 328
EN IEC 62311:2020

Οδηγία (ΕΕ) 2015/863 του Συμβουλίου για την τροποποίηση του παραρτήματος II της οδηγίας 2011/65/ΕΕ

"Υπεύθυνος για την κατάθεση αυτής της δήλωσης είναι ο:

Κατασκευαστής
στην ΕΕ

Εξουσιοδοτημένος εκπρόσωπος που έχει εγκατασταθεί



Υπεύθυνος για την κατάθεση αυτής της δήλωσης

Όνομα, Επίθετο : 白宗杭

Θέση/Τίτλος : Sales Engineer

Hangzhou

2024.07.24

(Μέρος)

(Ημερομηνία)

(Σφραγίδα της εταιρείας και νόμιμη υπογραφή)

